



**INTERIOR PLAN**  
NTS

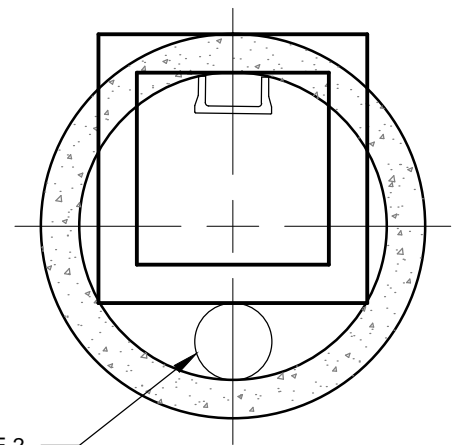

**ACCESS PLAN**  
NTS

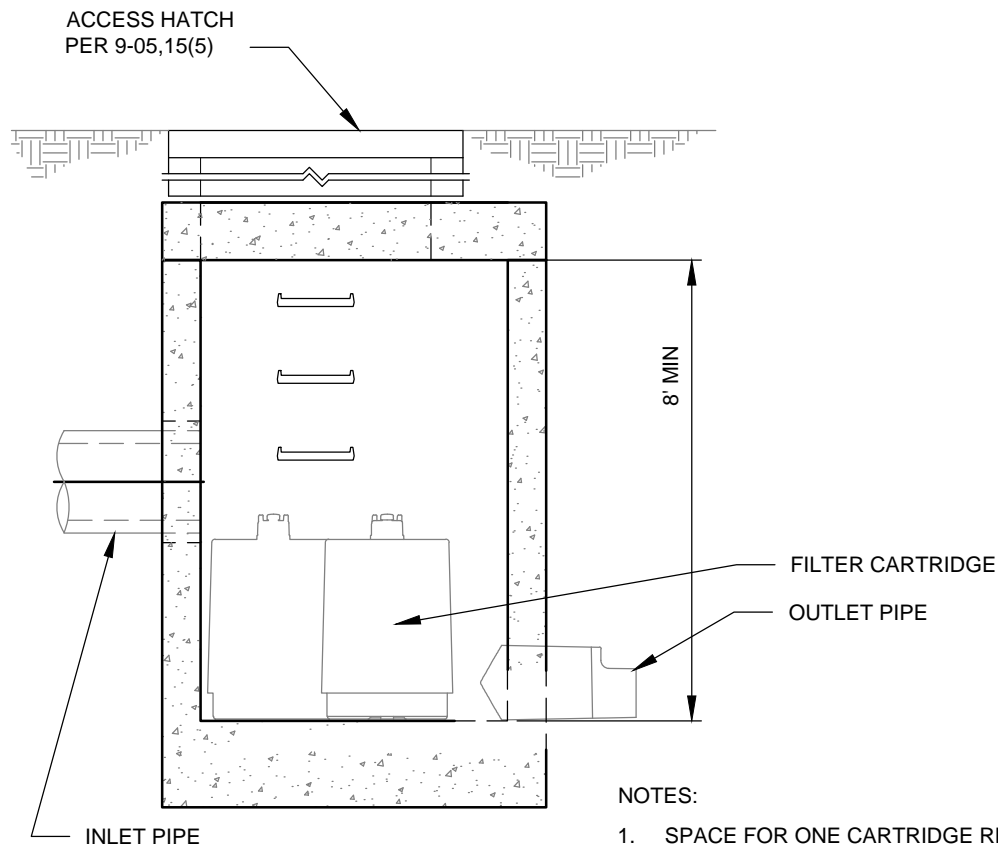

**SECTION A**  
NTS

**NOTES:**

1. SPACE FOR ONE CARTRIDGE REMOVED AND LEFT OPEN PERMANENTLY FOR MAINTENANCE ACCESS. SYSTEM SIZED TO TREAT SERVICE AREA WITHOUT "REMOVED" CARTRIDGE.
2. 12 INCH CLEANOUT OVER OUTLET PIPE IF IT IS NOT BELOW HATCH OPENING.
3. THE 8 FOOT MINIMUM CLEARANCE CAN BE REDUCED IF ACCESS HATCHES ARE PROVIDED ABOVE ALL FILTERS.

*Gary M. Schimek*

APPROVED BY: GARY M. SCHIMEK  
NATURAL RESOURCES/STORMWATER ENGINEERING MANAGER

REVISION DATE: MARCH 01, 2017



STANDARD DETAILS

**FILTER VAULT ACCESS**

FILE NAME: SD617A.DWG | DETAIL NUMBER: 617A